


Drawing	Certifications
---------	----------------



Certifications

**EN 12815**  
**DIN 18880**

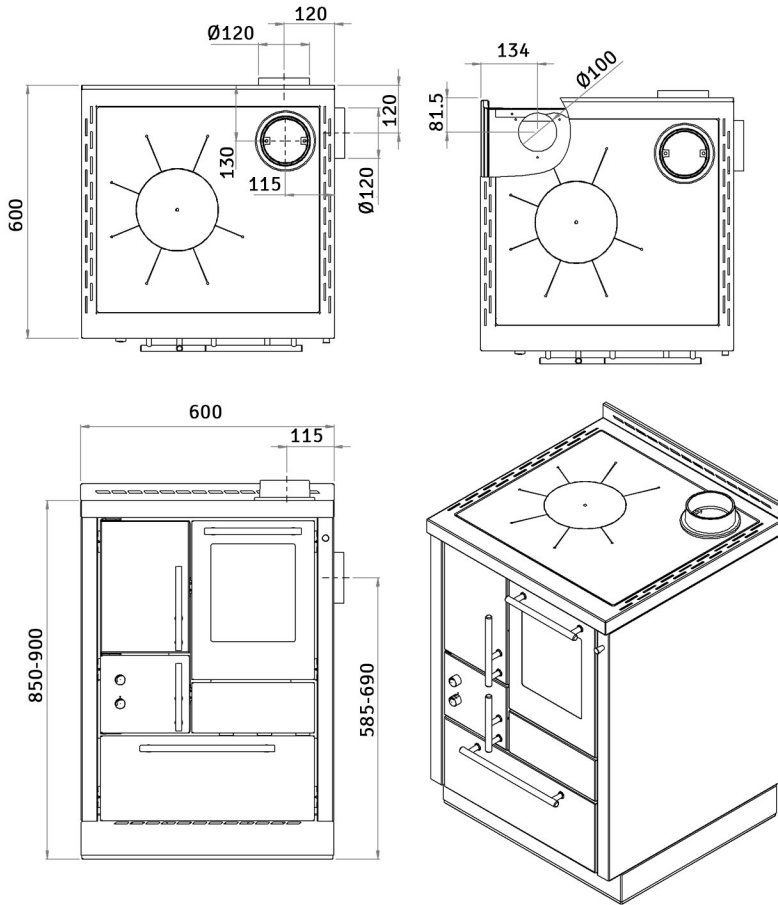

**ART. 15A B-VG**

Öko Combustion



EXTERNAL AIR INTAKE



ÖKO SERIES



AUTOMATIC CONTROL



MANUAL CONTROL

Technical specifications - rated power			Dimensions		
Power	7,1	kW	Firebox stokehole W/H	165x258	mm
Efficiency	82,3	%	Firebox size W/H/D	172/280/400	mm
Hourly consumption	2	kg/h	Oven size W/H/D	220/275/440	mm
Average flue gas temperature	228,5	°C	Hob W/H/D	527/487/8	mm
Draft flow rate	11	Pa	Flue pipe diameter	Ø120	mm
CO at 13% of O <sub>2</sub>	0,13	%	Adjustable height	850-900	mm
Dust particles at 13% of O <sub>2</sub>	39,2	mg/Nm <sup>3</sup>	Weight	183	kg
Technical specifications - reduced power					
Power	3,5	kW			
Efficiency	88,5	%			
Hourly consumption	1	kg/h			
Average flue gas temperature	125,5	°C			
Draft flow rate	11	Pa			
CO at 13% of O <sub>2</sub>	0,16	%			
Dust particles at 13% of O <sub>2</sub>	-	mg/Nm <sup>3</sup>			

The information contained in this data sheet is valid at the date of publication (November 2013). Greithwald Herde Srl shall not be held responsible for any printing mistakes. Greithwald Herde Srl works every day to improve its products, therefore it reserves the right to make technical changes at any time, without prior notice.